

# 8 x 6 Diesel Pump

## Vacuum Assisted

### Product Description

Diesel engine driven centrifugal pump equipped with vacuum-assisted priming system.

Trailer mounted for easy transportation having the following additional features: Run dry mechanical seal, Auto-start control, monitoring of fuel level, engine load, run time, oil and coolant temperature, and telemetry system.

### Technical Data

#### Operating Parameters

Min. / Max. Flow	400 gpm / 3610 gpm
Min. / Max. Shutoff Head	242 ft (105psi) / 601 ft (260psi)
Maximum Casing Pressure	260 psi
Maximum Temperature	200°F
Maximum Solid Size	1.5 inch
Min. / Max. Pump Speed	1200 rpm / 1900 rpm

#### Pump & Accessory Specifications

Suction / Discharge Size	8 inch / 6 inch
Impeller Diameter	21 inch
Vacuum System - Type / Capacity	Diaphragm / 50 CFM

Casing	Ductile Iron ASTM A536 65-45-12
Impeller	CA6NM Stainless Steel
Wear Ring	ASTM A48 Class 40 Gray Iron
Shaft	17-4PH Stainless Steel
Mechanical Seal Faces	Tungsten-Carbide vs Silicon-Carbide
Mechanical Seal Lubrication	ISO Viscosity Grade 32 or Lower <i>(synthetic recommended)</i>
O-rings & Gaskets	Buna-N & Viton
Check Valve Body	Ductile Iron
Check Valve Flapper	Buna-N
Check Valve Type	Swing type

#### Driver Properties

#### Type A

Driver Type	Diesel Engine
Driver Make	John Deere
Model	6135HF485
Max. Continuous Rating	600 hp
Total Displacement	13.5L liters
Aspiration	Turbocharged and air-to-air aftercooled
Number of Cylinders	6
Safety Shutdowns	Low Oil Pressure, High Temp.
Fuel Consumption	22.9 gal/hr @ 1800 rpm
Run Time	11.8 hours @ 1800 rpm
Fuel Type	No. 2 Diesel: <b>NO BIODIESEL</b>
Fuel Capacity	270 U.S. gallons

#### Type B

Driver Type	Diesel Engine
Driver Make	Scania
Model	DC16
Max. Continuous Rating	650 hp
Total Displacement	16.4 liters
Aspiration	Turbocharged charge-air cooled
Number of Cylinders	8
Safety Shutdowns	Low Oil Pressure, High Temp.
Fuel Consumption	22.5 gal/hr @ 1800 rpm
Run Time	13.3 hours @ 1800 rpm
Fuel Type	No. 2 Diesel: <b>NO BIODIESEL</b>
Fuel Capacity	300 U.S. gallons




### Notes

- Performance data based on water at 60°F
- Run time indicated is for reference and could vary based on speed and engine loads
- Maximum temperature is the equipment material limitation. Based on the application, process, product and NPSH requirements, the maximum allowable temperature could be lower
- This pump is also available with a 20 CFM venturi-compressor priming system
- There are other trailer variants, so double check dimensions on the actual unit being rented.

# 8 x 6 Diesel Pump

Vacuum Assisted


## Dimensional Drawing

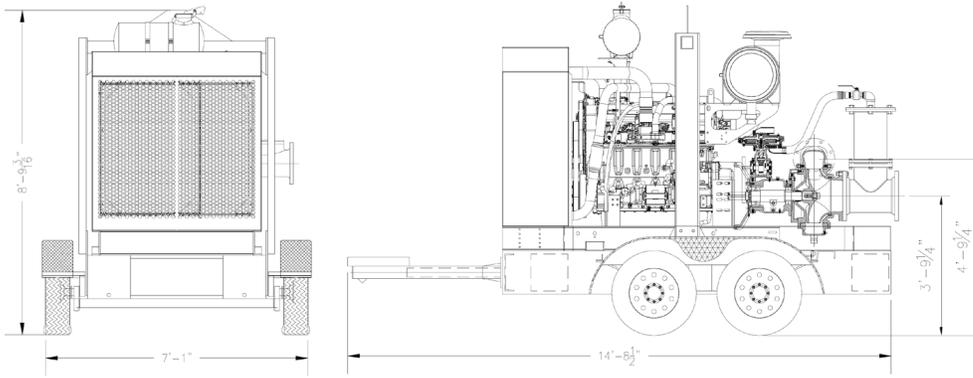

## Dimensional Details

Type A	
Total Weight wo/Fuel	10183 lbs
Total Weight w/Fuel	12100 lbs
Overall Height	106 inch
Overall Width	85 inch
Overall Length	177 inch
Type B	
Total Weight wo/Fuel	10183 lbs
Total Weight w/Fuel	12100 lbs
Overall Height	115 inch
Overall Width	91 inch
Overall Length	202 inch

## Performance Curve

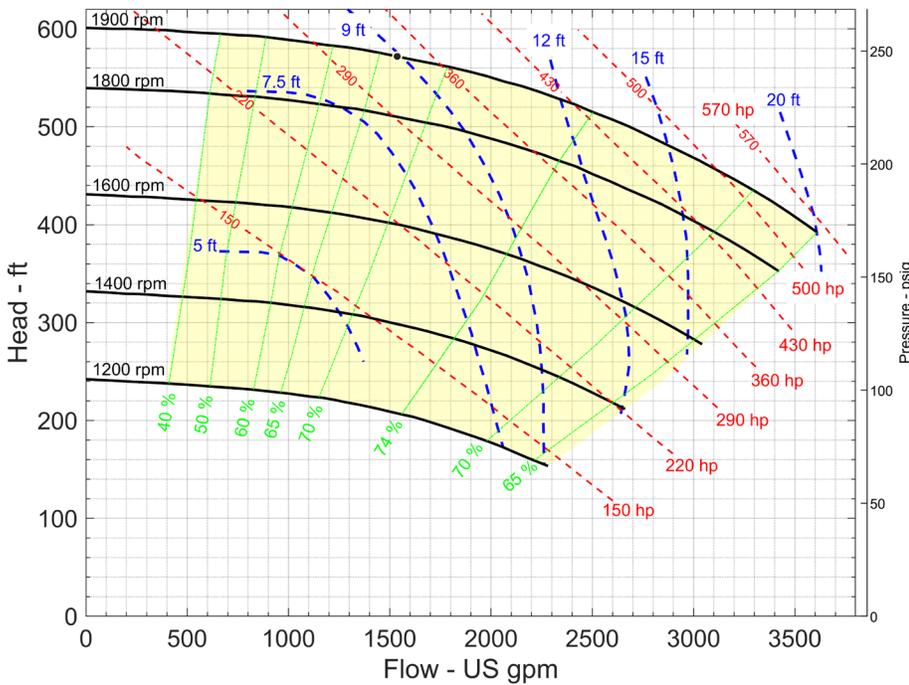

Pump Make	Pioneer Pump
Pump Model	PP86C21
Operating Speed	Variable
Min. Speed	1200 rpm
Max. Speed	1900 rpm
Impeller Rated Dia.	21 inch
Impeller Type	Enclosed
No. of Impeller Vanes	4
Solid Dia.	1.5 inch
Specific Speed	879 US Units
Suction Size	8 inch
Discharge Size	6 inch



100 First Stamford Place, Ste 700  
Stamford, Ct 06902 | USA

UnitedRentals.com | 800.UR.RENTS

© 2018 United Rentals, Inc.